


Indoor 1.5mm pitch SPEC.

	Model Name	IE015R
	Specification	Indoor
Physical Parameter	Pixel Pitch	1.5mm
	Pixel Configuration	1 red, 1 green, 1 blue
	Configuration (LxH, per cabinet)	640 x 360 pixels
	Diode Type	Surface Mount Device (SMD)
	Dimensions (mm, LxHxD, per cabinet)	960 x 540 x 63.1mm
	Dimensions (inch, inchxD, per cabinet)	43.3 inch x 3.13 inch
Optical Parameter	Brightness (Peak/Max) <sup>(1)</sup>	1,200nit / 600nit
	Viewing Angle - Horizontal	160° (TBD)
	Viewing Angle - Vertical	160° (TBD)
	Bit Depth	16bit per Color
	Color Temperature - Default	6,500K
	Color Temperature - Adjustable	2,800 ~ 10,000K (use S/BOX)
Electrical Parameter	Video Rate	50/60 Hz
	Input Power Range	100~240 VAC, 50/60 Hz
	Power Consumption - Max	502 (W/m²) / 260 (W/Cabinet) (TBD)
	Power Consumption - Typ	167 (W/m²) / 87 (W/Cabinet) (TBD)
	Heat Generation - Max (BTU/SF)	1,713 (BTU/m²) / 888 (BTU/cabinet)
	Refresh Rate	3,840 Hz
Operation Conditions	Working Temperature/Humidity	0°C~40°C / 10~80%RH
	Storage Temperature/Humidity	-20°C~45°C / 5~95%RH
	IP Rating	IP20
	LED Lifetime	100,000 hours
Certification	Certification	EMC Class A, Safety 60950-1
Service	Service	Front

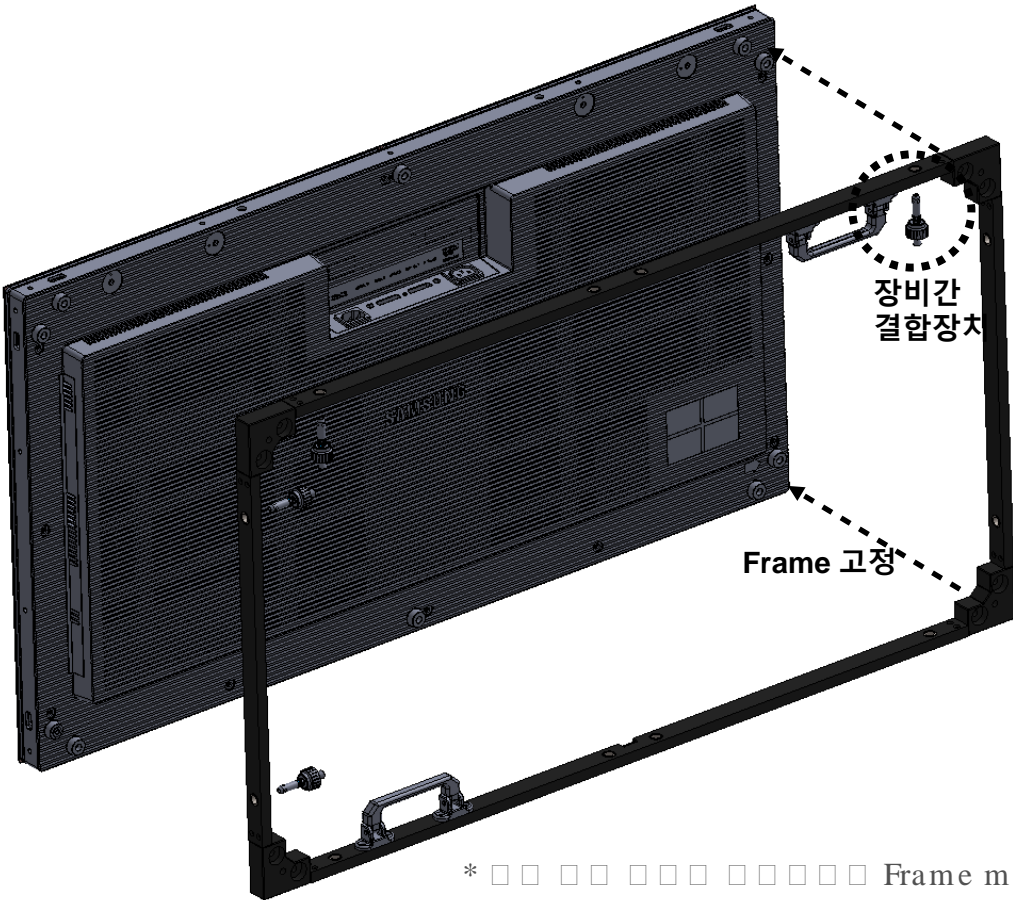

\* □ □ □ □ □ □ □ □ □ □ Frame modify  
\* □ □ □ □ □ □ □ □ □ □

Cabinet Dimension	960 x 540 mm
Aspect Ratio	16:9
Inch	43"
Installation	Landscape / Portrait Full Front SVC

	0.96m	1.92m	2.88m	3.84m	4.80m	5.76m	6.72m	7.68m	8.64m	9.60m
0.54m										
1.08m										
1.62m										
2.16m										
2.70m										
3.24m										
3.78m										
4.32m										
4.86m										
5.40m										

	1X1	2X2	3X3	4X4	5X5	6X6
P1.5 해상도	640X360	1280X720	1920X1080	2560X1440	3200X1800	3840X2160